

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
21 May 2004 (21.05.2004)

PCT

(10) International Publication Number  
**WO 2004/042141 A1**

(51) International Patent Classification<sup>7</sup>:  
H05B 6/00, G01N 21/00, F24C 15/24

D21F 5/00,

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/BR2003/000159

(22) International Filing Date:  
7 November 2003 (07.11.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
BR-PI-0204969-4  
8 November 2002 (08.11.2002) BR

(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:  
— of inventorship (Rule 4.17(iv)) for US only


Published:  
— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(71) Applicant and  
(72) Inventor: PAULO GERAIS DE CAMARGO, Rangel  
[BR/BR]; Rua Natale Capelato, 100, CEP-13277-230, Valinhos, SP (BR).

(74) Agent: AZENHA, José, Ricardo, Gonçalves; Rua Camargo Paes, 239, CEP-13073-350, Campinas, SP (BR).

(54) Title: MODULAR INFRARED IRRADIATION APPARATUS AND ITS CORRESPONDING MONITORING DEVICES

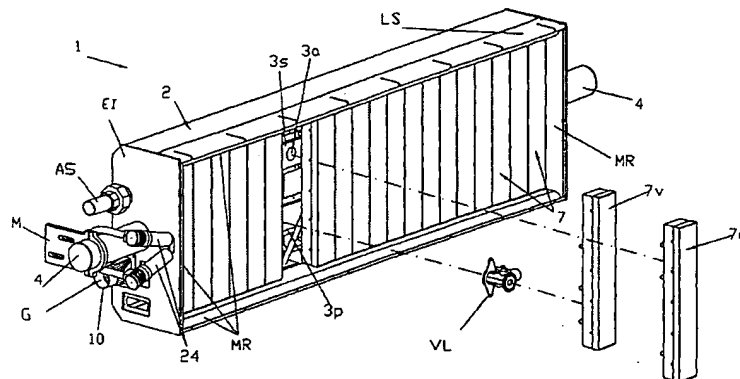

(57) Abstract: Heat irradiation apparatus (1) defined in terms of the following: - Refractory flexible irradiation module (7) comprising stopping means which are high temperature resistant and avoid shadow zones and side losses of heat at the burning zone in the ceramic surface; - Employment of refractory flexible ceramic plates (15) having flexible pores which permit air/gas modulation, the flexible pores permit define the path of the air/gas mixture through the ceramic plate (15). When the flow pressure of mixture is reduced, part of the pore automatically close and the combustible mixture is conducted to the surface where the hot fibers are placed. The fibres keep the combustion active at the surface, multiplying IR heating effects. Ceramic plates (15) of the art tend to "swallow" the flame causing an inner burning and reducing the efficiency of the process and/or loss of the control of the flame and equipment explosion. - Sensors and measuring means are provided for monitoring all steps: Thermal sensor (14) - safety device applied in the lower face of each flexible fibrous ceramic module (15), more particularly fixed in the support screen of the ceramic plate (15) and extending to median line of such plate (15), for monitoring a possible heat flow inversion due to external factors which cause the "flame swallowing". The apparatus further comprises oxygen measuring means (23) and an ultraviolet flame detector (24).

JC20 Rec'd PCT/PTO 09 MAY 2005

*11/pats*  
1

**MODULAR INFRARED IRRADIATION APPARATUS AND ITS  
CORRESPONDING MONITORING DEVICES**

**FIELD OF THE INVENTION**

The present invention refers to a modular infrared irradiation apparatus  
5 which employs combustion gas and its respective monitoring devices.  
Particularly, the apparatus of the present invention is directed to thermal  
transfer operations for provide quick and efficient thermal energy transfers at  
high rates as in industrial drying operations of paper making and cellulose  
industries. The irradiation apparatus comprises automation means for control  
10 the starting and all steps of the procedure which is performed by such  
equipment and permits multiple industrial applications.

**BACKGROUND OF THE INVENTION**

Technicians of the art, particularly those skilled in the continuous fibrous  
products manufacturing processes, know that a drying step (or a set drying  
15 steps distributed along the process) is a necessary step for drying coating or  
impregnating substances added to the product.

Known drying techniques employ heat transfer by direct contact between  
the heat receiver and the planar and/or cylindrical heat source or by means of  
hot air blowing.

20 The Infrared (IR) drying technique is the most preferred because the  
direct contact step for heat transfer is avoided. Thus, this embodiment normally  
employed for complementary drying applications in the traditional drying steps  
of the art.

For each known different drying step, the desired result, e.g., substrate  
25 features, and surface and physical properties, may differ. Therefore, in view of  
the above, a refined technique, derived from known embodiments, which is  
complemented by IR drying step is seen as the best result maker.

Recently, the use of an IR drying process has been seen as the best  
alternative because such technique is suited to several industrial applications  
30 and for provide solutions for old problems of the art.

The IR technique has particular features and such features make the  
difference when applied to known heat irradiation apparatus of the art. The IR

generation techniques are basically distinguished in the temperature average and in the frequency range of the irradiating element.

In the heat irradiation apparatus production, the selection of building materials determines the IR emission ability of such apparatus in some ranges of frequency, i.e., metallic irradiation elements generate long and medium waves. Ceramic irradiation elements at high temperatures generate short and medium waves. Generally, short waves have best penetration features in substrates in relation to long waves, and it permits that a substrate be dried without direct contact and avoiding damage to the dried substrate surface.

The electromagnetic energy produced at IR frequency bands, if correctly set, will be absorbed by substrate in such manner that the material will change, firstly in its initial state by absorbing heat and modifying its temperature. For volatile substances like water, the absorbed heat permits the change of physical state, from liquid to vapor, and thus the drying step occurs by evaporating all volatile mass contained in the substrate.

The amount of water to be evaporated from the substrate is a particular feature of the product and depends on the manufacturing route and the final application of such product. Therefore the intensity of thermal energy in each case is to be particularly determined.

IR use as a final controller of remaining volatiles in the substrate, e.g., the substrate humidity, is an alternative that depends of the irradiation element. If the element is able (or not) to change the heat emission power the process is able to dry the substrate at the desired level.

Several types of irradiation models as mentioned above are known in the art. Most of them comprise a metallic frame which enclose irradiation elements into metal housings, such elements are installed side by side transversally or alongside of the process direction. The irradiation elements are positioned near to the substrate path and at least one plenum air and/or air/combustible gas mixture distributor is provided.

Irradiation elements are positioned at a minimal distance from the substrate path in order to obtain a maximum of heat transfer efficiency and avoid unnecessary substrate distortions, e.g., cause wet bands in the substrate

due to the temperature differences of the housings in relation to the irradiation elements.

Most of equipment known in the art has such minimal distance limited by the housings. If they are closely positioned, "heat shadows" are created and it causes wet bands in the substrate. A good housing positioning is necessary for avoid such shadows. By other hand, the necessary positioning reduces the equipment radiation ability and creates an air/combustion gas stream which makes the substrate drying difficult. Thus for avoid this problem, additional heat equipment is provided in order to keep a good global efficiency.

Other problems related to combustion gas mixture quality may occur. The systems of the art generally employ a not standard combustible gas mixture composition. Such differences can alter the burning stoichiometry at the irradiation elements. So, the flame can return to the inner part of the equipment at the plenum zone or at the gas injection tips and cause explosions and the process is to be interrupted for repairs for long term.

Another problem of the art is the employment of several feeding heat recovery ducts. Ducts occupy a considerable space in the production plant and it reduces a best employment of the plant space and makes a new equipment installation difficult.

Some recent techniques employ irradiation elements made of continous refractory ceramic plates as a radiation emitter. Such plates are designed for cover all width of the process and are longitudinally positioned at one or more sections. Such arrangement comprises a limitation when the process is to be fitted for other ends.

Such models presently satisfy IR irradiation quality and operation maintenace necessities, but some problems are still found:

- Framed housings provide cold zones (shadows) and a bad heat distribution, thus the irradiation element is to be positioned farer and the global efficiency is reduced;
- The power modulation is necessary in some cases; therefore IR emission bands are moved to large waves region (Planck Law for Black Bodies). This changes reduces the penetration feature of IR rays, because the way of energy

is absorbed depends on the length of the wave emitted from the emission element and it causes temperature gradient differences in the substrate, the evaporation is not effected and the substrate surface is burned. Depending on the technique an wave modulation is not possible;

5 - Equipments found in the art are not suited for permit sample collection from an open chamber and the residual oxygen content after the combustion is not detected.

- Even all safety steps have been taken, all equipment of the art are potentially dangerous and an explosion hazard is possible. Irradiation elements  
10 manufacturers of the art consider this possibility hard to occur, thus the design of such irradiation elements did not involve safety care.

Industries of the art need safe and low maintenance equipment for reduce the interruption time for repairs.

#### **SUMARY OF THE INVENTION**

15 According to the above discussed and in view of the above mentioned problems, the present invention provides a modular IR irradiation apparatus which employs combustion gas and its respective integrating devices for automatically control the air/gas mixture, for sequencing the process starting, for interlocking the equipment and the corresponding process. Some  
20 modifications in the irradiation modules have been done in order to eliminate shadow zones and to enhance gas flowability; such improvements are achieved by means of a fibrous ceramic. The fibrou ceramic have flexible pores through which the air/gas mixture flows and after the air/gas mixture emerges from an escape surface an ignition means is driven and a fire line provided and kept  
25 stable over the ceramic escape surface which acts as IR irradiation element at high frequency bands.

This preferred embodiment permits a safe operation, because the flexible fibrous ceramic does not resist to pressure, causing minimal intensity explosions and provides soft fragments when exploded. The modular design  
30 permits multiple arrangements being fitted to any drying processes, enhances the continous irradiation element operation.

All the above objectives are achieved acorrding to the following steps:

- Refractory flexible irradiation module comprising stopping means which are high temperature resistant and avoid shadow zones and side losses of heat at the burning zone in the ceramic surface;
- Employment of refractory flexible ceramic plates having flexible pores which permit air/gas modulation, the flexible pores permit define the path of the air/gas mixture through the ceramic plate. When the flow pressure of mixture is reduced, part of the pore automatically close and the combustible mixture is conducted to the surface where the hot fibers are placed. The fibres keep the combustion active at the surface, multiplying IR heating effects. Ceramic plates of the art tend to "swallow" the flame causing an inner burning and reducing the efficiency of the process and/or loss of the control of the flame and equipment explosion.
- Sensors and measuring means are provided for monitoring all steps: **Thermal sensor**- safety device applied in the lower face of each flexible fibrous ceramic module, more particularly fixed in the support screen of the ceramic plate and extending to median line of such plate, for monitoring a possible heat flow inversion due to external factors which cause the "flame swallowing". For example, a heat reflection means positioned in front of the irradiation element in order to return IR energy back to the irradiation element and creating an resonance effect for store heat in the irradiation element and make the flow inversion. This device avoid misemployment problems by blocking the irradiation element. This provides an extended work life of the ceramic plate.
- Oxygen measuring means** – Continuous measuring based on Zirconium oxide. This device collects combustion gases over the burning surface in at least one module of refractory ceramic, for continuous analysis ends, permitting a flame optimization e an after burning residual oxygen controlling. Such sensor is connected to a LPC ( Logical Program Controller) of the monitoring, interlocking and alarming system which is driven when the level of oxygen does not match with the standard value. **Ultraviolet (UV) Flame detector** - It is applied in the external face of the metallic frame, more particularly, near to the combustible gas inlet, for flame detection, i.e., for combustion detection in the ceramic modules. The flexible ceramic concentrates the burning in its surface, the IR

generation occurs basically in the short waves range, including some residue at the beginning of the UV spectrum which is identified by the UV detector. The UV detector is assembled as an cathode anode discharge vessel, known in the art, inserted in a housing or specially designed device for support severe operation conditions. The housing have a cylindrical shape made of metallic material provided with a lower hole and channels for better air circulation. Refrigeration air flows from refrigeration ribs and also from the ceramic discharging tube of the receptacle body of the sensor, keeping the inner pressure positive and external particulate material entrance is avoided (the equipment can use two UV flame detector); **Bed** – all flexible refractory ceramic modules and the first and the second plenum distribution means are positioned in the bed which is made of metallic plates having two handles and two mirrors and bottom caps and counterventing strips. Between the handles and the bottom caps a safety system is provided for permit an easy opening of the caps for maintenance or for avoid bed expanding in case of explosion. The locking system permits determine the effects of an explosion.

#### **APPLICATIONS AND ADVANTAGES**

Several advantages are achieved by means the present invention. The novel modular IR irradiation means and its electronic devices permit a better control during the operation and an enhanced global efficiency for thermal energy.

Other advantages are as follows:

- Flexible ceramic modules of the present invention permit uniform IR emission in all burning zone, avoiding shadow zones without irradiation;
- The absence of shadow zones permits that the irradiation surface be placed near to the substrate avoiding losses caused by air/gas streams and providing a collimation cavity for IR emission for avoid radiation scattering.
- Ceramic plates stopping in the irradiation modules comprise other feature of this invention, since it meets thermal-physical requirements and avoid energy dispersion over the limits of burning zone edges.
- LPC can be programmed for logoff some modules when other are still active and meet substrate width variations requirements.

- The fiber web has some anisotropic free grade related to a particular movement. When the gas passage is forced through the flexible ceramic, other pores are forced to open avoiding pore saturation, making the pores equivalent in relation to the conduction ability of the mixture. The average pore diameter is automatically adjusted for keep balance between the pores. This permits a gas volume and the power level modulation and keep the discharge rate controlled and fitted to the minimum limit.
- The oxygen measuring means application makes possible the residual smoke collection after the burning for continuous monitoring of the residual oxygen and this system can detect failure in the combustible gas feeding. Other feature of such means is that it is able to keep a high burning efficiency and keep the previous defined stoichiometry for obtain the desired temperature and IR band results.
- Two rectangular plenum employment as mechanical support of the modules permits the gas mixture feeding in the modules by means modular valves or blocking valves, when modifications and/or improvements are necessary.
- The metallic frame building having inner pressure rate and overpressure alleviating means, meets the safety requirements as the explosionproof equipment, providing a safe operation for workers and equipment.

## DESCRIPTION OF THE DRAWINGS

The present invention is best defined, but not limited to, according to the drawings as follows:

Figure 1 is a perspective view of the modular heat irradiation element provided with some irradiation modules in ready to use position and one module in exploded view;

Figure 2 is cross sectional view of the IR irradiation element of the present invention;

Figure 3 is exploded perspective view of a irradiation module, illustrating all its components;

Figure 4 is a sectional view of an oversized detail of the stopping means in the ceramic plate;



Figures 5 and 6, illustrate, respectively, side and sectional views of the irradiation module;

Figure 7 is a perspective view of part the bed and primary and secondary plenum distribution ducts;

5 Figure 8 illustrates the entire bed with more details, in exploded perspective, showing the positioning of the oxygen measuring means and flame UV detectors;

Figure 9 is a cross sectional view of the bed, showing the mounting system with safety device for alleviating the explosion;

10 Figure 10, is an oxygen measuring means, in a more detailed perspective view;

Figure 11 illustrates the oxygen measuring means mounted on the IR modular irradiation element;

15 Figure 12 is an exploded perspective view of the UV sensor bulbs support housing; and

Figure 13 is sectional view of the UV flame detector of the invention.

#### **DETAILED DESCRIPTION OF THE INVENTION**

Referring to the Figures, the present invention refers to a **MODULAR INFRARED IRRADIATION APPARATUS AND ITS CORRESPONDING**  
20 **MONITORING DEVICES**, the modular heat irradiation apparatus (1) is directed to heat transfer operation involving elevated rates of heat to be continuously transferred to a receiving substrate, e.g., industrial drying process of fibrous products as paper or cellulose (L) (Figure 2).

According to the present invention and Figures 1 and 2, the modular heat  
25 irradiation apparatus basically comprises a metallic frame or bed (2) which is designed for receive a number of irradiation modules (7), according to process width and in such manner to receiver distribution and support ducts, primary plenum (3p), secondary plenum (3s) which possesses gas/ar (G) mixture feeding outlets (3a) to the modules (7).

30 The employment of two plena having rectangular shape (3p and 3s) serve as mechanic support fo the modules (7) in order to position them in such manner to permit the gas/air mixture (G) feeding in the modules (7) by means a

modulation/blocking valve (VL) coupled to the primary plenum (3p) or blocking free directly coupled to the secondary plenum (3s). The module presents an unique mixture (G) inlet (4) which can be positioned aligned to the primary plenum (7v) or secondary plenum (7d), depending on the final application which  
5 can be defined by turning the module 180° and by opening passageway (3a) of the primary plenum (3p).

Such procedure can be accomplished even after the original assembling be concluded when a modification is necessary or when power control is to be installed.

10 Plenum (3p, 3s) are fed, firstly by the primary (3p) employing at least one side duct (G), which is further used by the secondary (3s) by means of an inner joint (JR) which is optionally and restricting means (Figure 7).

The bed (2) is made of two mirror joining (LI/LC) having lower laterals (LI) and axle type fixing supports (4) (Figure 1) which are fixed to the processes by  
15 means of locking bearings (M), permitting adjustment of the equipment angle at the moment of the installation in relation to substrate flow direction (L).

Also, the bed has the upper side (LS) comprising lateral channels for alleviating thermal dilatation (AD) and resist to temperature variations between the upper edge and the lower edge and receiving refractory material (MR) to the  
20 irradiated IR, in order to define one irradiation cavity (CR), joined the frontal face, which is provided with irradiation modules (7). Such modules (7) are transversally positioned to the longitudinal axle of the bed (2) and arranged side by side in order to define a regular planar surface. The bed is further closed by metallic caps (6) which description will be provided after.

25 The mirror (EI) of the bed (2) (Figure 1) is provided with sealing air inlet duct (AS) for keep the inner cavity of the equipment pressurized and refrigerated; such air inlet has an independent feeding and is directed to avoid entrance and storing not desired materials and gases in the cavity, protecting the frame against gas losses. The pressurized air is directed to UV system  
30 refrigeration and venturi system, both detailed in the present application.

Irradiating modules (7) can be made in variable dimensions and width, and according to Figures 3,4,5 and 6 each one of the irradiation modules(7) is

made of metallic material base receiver(8), containing a feeding hole (9), positioned and not centralized in relation to the surface of such base, for aligning with other plenum support (3p/3s) at the moment of the mounting, just inverting the module according to the plenum. The mounting at the side of the  
5 plenum (3p or 3s) is achieved employing a stopping ring (11) fitted to the feeding hole (9), which ring permits a good positioning of the module when the fixation occurs over the distribution plenum (3p, 3s) and each module (7) is fixed in the plenum by screws restraining pins (P).

The base (8) receives at its free edge, a screen (12) containing holes  
10 (12a) having suitable dimensions and shapes, in the lower face of the screen (12) are fixed at least two sets of sensors of thermal flow (14) interconnected by the electronic circuit (13); such sensors extend over the screen to deep contact the penetration layer of the ceramic (15) where the sensors are fixed thereto. The sensors are interconnected to an electronic device (14a), which is  
15 connected to the LPC central, not shown.

At the upper face of the screen (12) is positioned a porous flexible refractory ceramic plate (15), in which median part, under the central line (Y) (Figure 6), the thermal flow sensors (14) are kept positioned. The housing deep is determined at moment of the mounting.

Each refractory flexible ceramic plate (15) (Figure 4) is made of sealing  
20 means (S) which are high temperature resistant and arranged in thin ceramic housings (16) and placed at the side faces of the ceramic plate by means of a high temperature resistant elastomer (17) layer(Figure 4) which is able to penetrate between the parts (15, 16) in order to produce and anchoring  
25 phenomena, adhering to said parts and avoiding lateral dispersions (D) of combustible gas in the ceramic plate through the screen holes (12a) by stopping them. This keeps the burning zone restricted to the face (D1) in the surface of the ceramic plate (15).

The block comprising the flexible refractory ceramic plate and the thin  
30 ceramic housings (16) are fixed to the screen (12) by means of an elastomer layer (17) suited to high temperatures, complementing the sealing means of the irradiation modules (7) and producing a flexible joint which supports natural

vibrations which occur during the operation of the equipment and fit different materials possessing very thermal dilatation coefficients, i.e., the different ceramic materials and the metallic carcass.

One of this features of the refractory ceramic plate (15) is the flexible  
5 pores (see detail A in Figure 3), where the fiber positioning (F) kept ready to move (V), due to forced passage of gas (G); this free movement feature permits a dynamical distribution of the gas flow through the pores (R) of the fibrous structure, thus making the pores open and/or closed when necessary, depending on the use condition and keeping the balance between them. The  
10 gas volume flowing through the ceramic plate is able to be modulated and the emission power of the irradiation element is indirectly modulated by varying the combustible gas volume (G), but keeping active the discharge rate of the pores compatible to the combustion rate, therefore, the flame is stably positioned at the first layers (D1) of the flexible ceramic.

15 Other feature of the flexible ceramic (15) is that even under mechanical erosion the above mentioned properties are maintained, because the above described phenomena, which keeps the flame balance, occurs in the surroundings of the fire line, i.e., at the first 3mm to 5 mm deep of the flexible refractory ceramic plate. Erosion or removal of part of such surface material  
20 does not modify the flame balance which always occurs at the surface (D1) of the ceramic plate independently of the surface shape.

Another property of the ceramic plate associated to the flexibility feature and not affected by erosion, as stated above, is the ability of the irradiation element resist to dropping contamination, e.g., ink dorps in a continous painting  
25 process of paper. The drop material at the surface of the irradiation surface can be easily removed by mechanic procedures of scratching or abrasion avoiding other cleaning procedures and the system is quickly restored.

The bed (2) (Figures 1,2 and 8) as previously stated, is made of lower side metallic plates (LI) having angular flaps (18a), closing mirrors, blind mirror  
30 (EC) and instrument mirrors (EI) having holes suited to the devices to be fixed therein and botton caps (6) having side flaps (6a) e closing flaps (22 and P1); such side plates (LI) are alterned with counterventing channels (21) while the

bottom caps (6) have one flap (22) at one side fixed by engaging to one of the LI flaps (18), and at the other side, the flap is fixed by means of screws (P1), therefore is provided one safety device between the lower side plates (LI) and the bottom cap (6), the particular geometry feature of the caps permits that the  
5 flaps (18, 22) be easily unlocked offering an escape area for gases, in the case of internal explosion, the cap (6) is fixed to the structure by means of the screws (P1) for permitting the removal of the cap for maintenance ends.

Modular heat irradiation apparatus (1) is equipped with automatic lighting devices and monitoring means, which are interconnected to the LPC, not  
10 shown, such devices comprise the trigger (CT) and sensors of thermal flow (14), oxygen measuring means (23), and the UV sensor (Figure 13), better detailed ahead.

Automatic lighting system comprises the assembling of some trigger electrodes (CT). The lighting is produced by ionizing the air by using a high  
15 tension source which discharges over the bed (2). The triggers are mounted in a number which is enough for permit the lighting of the irradiation element even part of such triggers are disabled.

Thermal flow sensor (14), which position has been previously detailed, is the responsible for monitoring de heat flow inversion, since each sensor (14)  
20 monitores a maximum temperature differential between the median line (Y) of each ceramic plate (15) and the temperature of the feeding gas of the module, the verification occurs at the LPC for turn the equipment off when the differential is greater than maximum permitted limit, this would indicate thermal flow inversion, i.e., the flow is returning to the gas plenum and probably an explosio  
25 would occur. The thermal flow sensor is also used to indicate an erosion process in the ceramic plate and the replacement of such plate is necessary.

The Oxygen measuring means (23) (Figuras 10 and 11) employ, a sensor (26) based on Zirconium oxide, which is positioned in one device containing a temperature controlled chamber (26) (temperature control system  
30 not indicated), and such device is formed by five tubular bodies (27, 28, 30, 31 and 33) welded (29) one to the other, the set (23) is fixed by a holder (34) positioned in the inner flap of the upper side (LS). An extension is fixed to the

tubular body (28) forming a venturi type system (30), the tube (30) having the greatest diameter conducts the sealing pressurized air inside the bed to outside. When the sealing air passes between the tube (30) and the broader section of the tube portion (31) it is accelerated in order to effect vacuum inside the portion (31) and in the body (28), providing a vacuum chamber, while the collector tube (33) conducts the smokes collected in the inner part of the chamber (28). The collection tip (35) is coupled to the upper portion of the tube (33) and holes and the concentrating flaps (37) are provided in the lower part (36) of such tip. The lighting system also employs the the tip (35) as ground contact for discharge the trigger.

The oxygen measuring means (23) is applied near to the burning zone, (D1) in order to continuous analyze the combustion of the irradiation element, optimizing the burning and controlling the amount of residual oxygen after the combustible burning. Such sensor is connected to the LPC of the monitoring system. Parameters of operation are adjusted in view of the desired application and the kind of combustible gas is used.

UV detector (24) (illustrated in Figure 1 and more detailed in Figures 12 and 13) can be double assembled, i.e., two flame detector (24) can be for each irradiation element (Figura 1), each detector has an UV sensor bulb which is commercially available and its respective encapsulating system (39) installed inside the cooling system (40) extending to collimation cavity of IR emission (CR) by a ceramic bulb (47) restricting and protecting the sight of the bulb and the sight field against obstructing clouds of vapor from the process or against UV emissions from other external sources. UV sensors (24) are positioned at the external side of the the instrument mirror (EI), more particularly fixed to the supports (44) which are fixed by tubes which are employed to conduct the pressurized sealing air inside the support tube from the irradiation element (4) to the cooling body (40).

Each set of UV detector (24) additionally comprise a cooling body (40) having ribs (41) at its external face in order to provide cooling channels for keep the internal housing chamber (42) of the sensors (38, 39) cool; such protection comprises a lower hole (43) which is coupled to the metallic box type support

(44) through which cooling air and connection wires of the electronic excitation and monitoring (called flame relay) are conducted.

The ceramic protector tube (47) is fixed to the cooling body (40) by the flange (45) which possesses inner tips as restraining means (46) of such tube  
5 (47).

A skilled person will see that the scope of the present invention is novel: irradiation modules, the monitoring performed by the sensors and measuring means via discrete electronic controls or LPC, the modular heat irradiator and its improved shape, a high efficiency of the heat transfer between the irradiating  
10 surface and the receiving substrate, the equipment designed for being easily adapted in any industrial process and all beneficial effect achieved by this means which permit remarked improvements in the volatile removal from substrates, particularly wet removal from paper ou cellulose drying processes and the invention concept which permits a long term use of the equipment of  
15 the present invention and reducing maintenance interruptions.

Even the above mentioned invention be detailed for offer a better understanding, the same is not limited to the revealed applications or particular details presently revealed.

Other embodiments and variations of the present scope is intended as  
20 belonging to the present invention.

### CLAIMS

- 1 - **MODULAR INFRARED IRRADIATION APPARATUS AND ITS CORRESPONDING MONITORING DEVICES**, the modular IR irradiation apparatus (1), more particularly directed to heat transfer at elevated rates to a receiving substrate (L), as in industrial drying steps of paper and cellulose production; the modular IR irradiation apparatus (1) comprises a metallic frame or bed (2), which is designed to receive a number of irradiation modules (7), containing primary plenum (3p) and secondary plenum (3s) distribution ducts which contain feeding outlet (3a) for the mixture of combustible gas and air (G) to the modules (7); characterized in that the modular IR irradiation apparatus (1) comprises :
- Mounting means which is explosion proof and blocks the bed (2) by means of side lower (LI) and upper (LS) metallic plates arranged in a laminar portion having angular flaps (18) fixed in side closing mirrors (19) and having further closing of bottom caps (6) having side flaps (6a) and closing flaps (22 and P1) and being engaged in an longitudinal latche (22) in the flap (18) of the lower plate (LI); the blind mirror (EC) and the instrument mirror (EI) having holes which are fitted to the devices to be fixed thereto;
  - Constructing means for fixing the irradiation element (1) to the process via support tube (4) and locking bearing (M);
  - Constructing means for housing, feeding, and combustible gas (G) distribution in the flexible refractory ceramic (15) modules (7) mounted transversally to the cavity (CR) of the bed (2);
  - Mechanical means of pressurized sealing air admission (AS) in the mirror (EI) of the bed (2), pressurization of the inner cavity of the equipment, cooling the UV system and provide a venturi effect of the oxygen measuring means;
  - Constructing means for side mounting and sealing (17) of the flexible refractory ceramic (15) of the modules (7) and fixation of the ceramic thin housings (16) with elastomer (17);
  - The flexible refractory ceramic (15) is malleable and have a porous feature related to the fibrous mass;



- Monitoring device of the thermal flow direction of the modules (7) by using sensors (14);

- Collecting and monitoring device of the smokes from the surface burning (D1) of the modules (7) by using oxygen measuring means (23) based on  
5 Zirconium oxide;

- UV flame detection device (24) applied in the tube (4) positioned to the cavity (CR) and the surface (D1).

2 - **Apparatus**, according to claim 1, characterized in that the metallic sides (LS) are provided with alleviating and dilatation channels (AD).

10 3 - **Apparatus**, according to any one of claims 1 or 2, characterized in that each irradiation module (7) comprises a base receiver (8) having a feeding hole (11), each module (7) is fixed to the plenum (3p, 3s) by means of screws and pins (P); the referred base (8) receives at its free edge a screen (12) having holes (12a) and in which lower face are fixed at least two set of thermal flow sensors (14)  
15 interconnected by the electronic circuit (13); such sensors (14) are interconnected to an electronic device (14a) which is connected to the LPC central; at the upper face of the referred screen (12) is positioned a porous flexible refractory ceramic plate (15) and its respective fixing means, side sealing (17) (S) in which lower median portion the sensors (14) are kept.

20 4 - **Apparatus**, according to claim 1, characterized in that the bed (2) internally receives rectangular support and distribution ducts, a primary plenum (3p) a secondary plenum (3s) which possesses a feeding tube (10) and outlets (3a) for feeding the modules (7) with combustible gas/air mixture (G) such ducts are aligned to holes (9) existing in each one of modules (7) directed to the  
25 secondary plenum (3s) or via modulation or blocking valve (VL) to the primary plenum (3p).

5 - **Apparatus**, according to claim 4, characterized in that the feeding hole (9) of each module (7) is positioned in relation to the surface called base (8).

6 - **Apparatus**, according to any one of the preceding claims, characterized in  
30 that the modules (7) can be coupled via feeding hole (9) to the primary plenum (3p) or to the secondary plenum (3s) by a 180° rotation position inversion of each module (7).

- 7 - **Apparatus**, according to any one of the preceding claims, characterized in that the modules can be framed in variable lengths and widths.
- 8 - **Apparatus**, according to claim 3, characterized in that holes (12a) of the screen (12) have circular dimensions or other suited dimensions.
- 5 9 - **Apparatus**, according to claim 3 characterized in that thermal flow sensors (14) overpass the screen (12) until effect a deep contact to the ceramic (15) where the sensors are fixed in one position under the line (Y).
- 10 - **Apparatus**, according to any one of the preceding claims, characterized in that the side stopping means (S) of each plate of flexible refractory ceramic are
- 10 arranged for fit in thin ceramic housings (16) anchored at the side faces of the ceramic plate by an elastomer layer (17) which is able to penetrate in both parts (15, 16).
- 11 - **Apparatus**, according to claim 10, characterized in that the sealing means (S) serves as anchoring means adhering to the parts (15, 16) and avoiding side
- 15 dispersion (D) of the combustible gas/air mixture (G) entering in the ceramic plate (15) via screen holes (12a).
- 12 - **Apparatus**, according to claims 10 and 11, characterized in that the sealing means (S) of each one of ceramic plate (15) avoid a side burning zone (D) keeping the burning zone restricted to the face (D1) existing at the surface
- 20 of the ceramic plate (15).
- 13 - **Apparatus**, according to claim 11, characterized in that block comprising the flexible refractory plate (15) and the thin ceramic housings (16) are fixed to the screen and to the base (8) by applying an elastomer layer (17) producing a flexible sealed junction which supports natural vibrations.
- 25 14 - **Apparatus**, according to any one of the preceding claims, characterized in that the elastomer (17) is high temperatures resistant.
- 15 - **Apparatus**, according to any one of the preceding claims, characterized in that the refractory ceramic plate is flexible and porous.
- 30 16 - **Apparatus**, according to claim 15, characterized in that the fiber fabric (F) of the ceramic plate (15) is kept free for movements (V) which can occur due to the forced passage of gas (G), permitting the movement for distribution of gas flow through the pores (R) of the fibrous structure.

17 - **Apparatus**, according to claims 15 or 16, characterized in that the porous flexible refractory ceramic plate (15) permits modulation of the gas volume (G) and the emission power of the irradiation apparatus (1) keeping the rate of discharge in the active pores compatible with the combustion rate and keeping  
5 the emission temperature and the flame position stable at the first layers (D1) of the ceramic plate (15).

18 - **Apparatus**, according to any one of preceding claims, characterized in that the thermal flow sensor (14) is able to monitoring the thermal flow inversion at the ceramic plate (15), and keeping a maximum temperature differential at de  
10 median line (Y) in each ceramic plate.


19 - **Apparatus**, according to claim 18, characterized in that the sensors (14) are verified by the LPC which is the responsible for the temperature differential monitoring in each plate (15) and generates a gas blocking alarms.


20 - **Apparatus**, according to any one of the preceding claims, characterized in  
15 that the oxygen measuring means (23) comprises a Zirconium oxide based sensor (25) which is applied near to the burning zone (D1) and is able to monitoring and analyzing the amount of residual oxygen after the combustible burning; the sensor is connected to the LPC of the monitoring system.


21 - **Apparatus**, according to claim 20, characterized in that the oxygen  
20 measuring means (23) comprises a device having a temperature controlled chamber (26) formed by five tubular bodies (27, 28, 30, 31, 33) which are welded (29) one to the other, the set (23) is fixed by holders (34) at the side upper internal flap (LI), the tubular body (28) is fixed in one extension (31) which is able to form a venturi system joined the tubular body (30), the tube (30) have  
25 the greatest diameter for conduct the pressurized sealing air from the bed (2) to outside, a collecting tip (35) is coupled to the upper edge of the tube (33) and it is provided with holes (36) at the lower position and with concentrating flaps (37).

22 - **Apparatus**, according to claims 20 and 21, characterized in that the  
30 collecting tip (35) is used by the differential lighting system as ground contact for discharge the trigger.

- 23 - **Apparatus**, according to any one of the preceding claims, characterized in that the UV flame detector (24) comprises an UV bulb sensor (39) encapsulated and protected (38) inside the cooling device (40) which extends to the collimation cavity of IR emission (CR) via ceramic tube (47); the UV sensors
- 5 (24) are positioned at the external side of the instrument mirror (EI), more particularly fixed at the supports (44) by means of tubes (48) which serve to conduct pressurized sealing air inside the irradiation support tube (4) to the cooling body (40); the cooling body (40) comprises flaps (41) at its external face defining cooling channels for keeping the inner chamber (42) of the sensor
- 10 housing (39) cool; such body also comprises an lower hole (43) coupled to the metallic box type support (44) through which the cooling air is conducted and the wires connecting the electronic monitoring part ( flame relay); the ceramic protection tube (47), is fixed to the cooling body (40) to the flange (45) which possesses inner tips as retention means (46) of such tube (47).
- 15 24 - **Apparatus**, according to claim 23, characterized in that the UV flame detector (24) can be double mounted and being placed two flame detectors (24) to a single irradiation apparatus (1).
- 25 - **Apparatus**, according to claims 23 and 24, characterized in that the ceramic tube (47) restrains and protect the sight field of the bulb (39) against
- 20 obstructions caused by vapor clouds from the process.



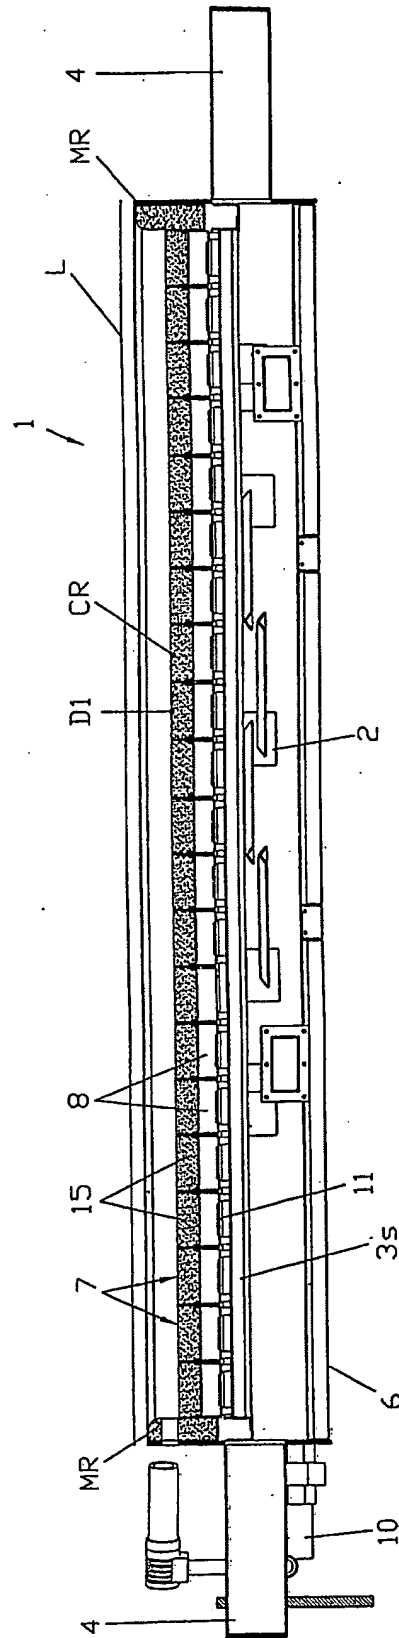

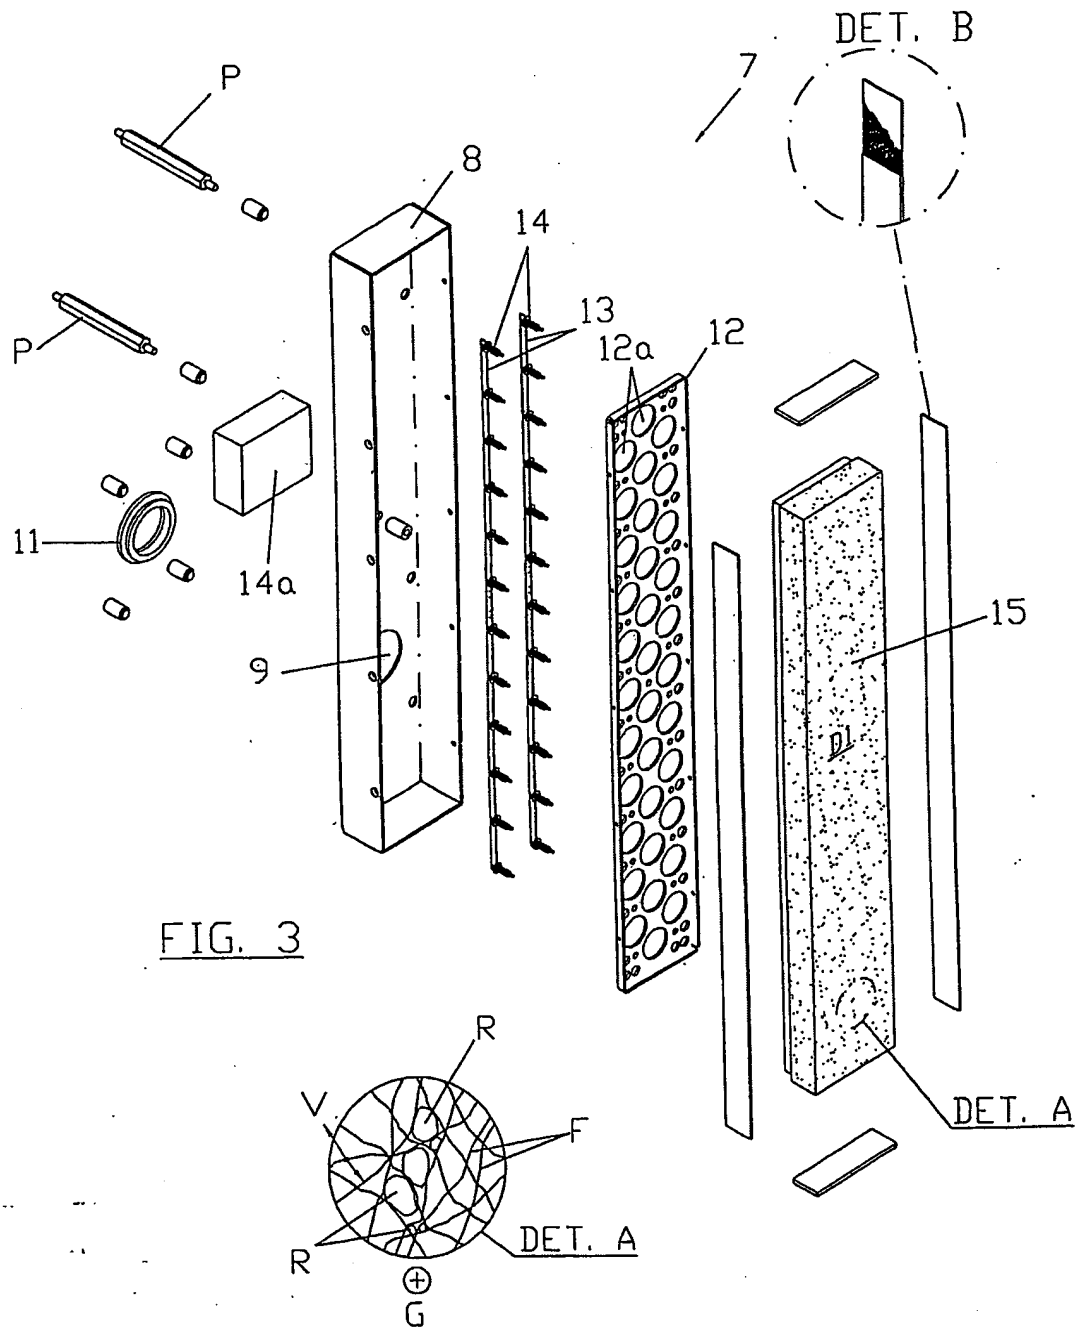

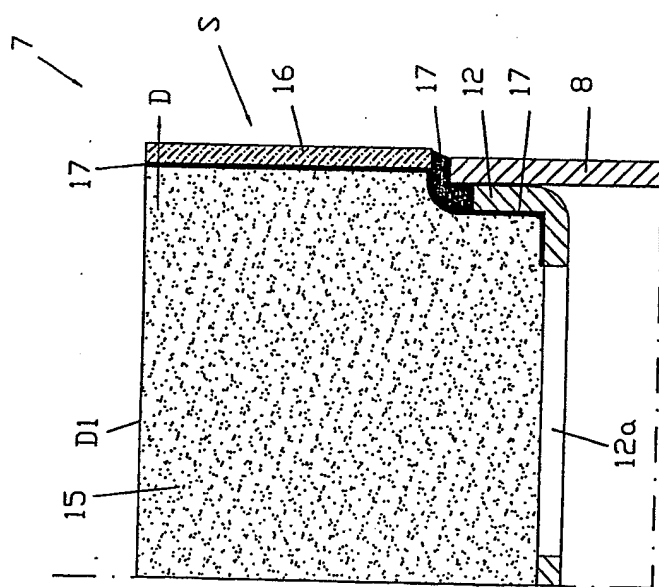
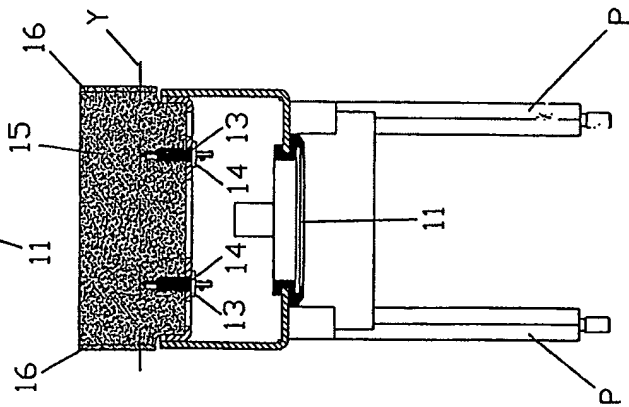
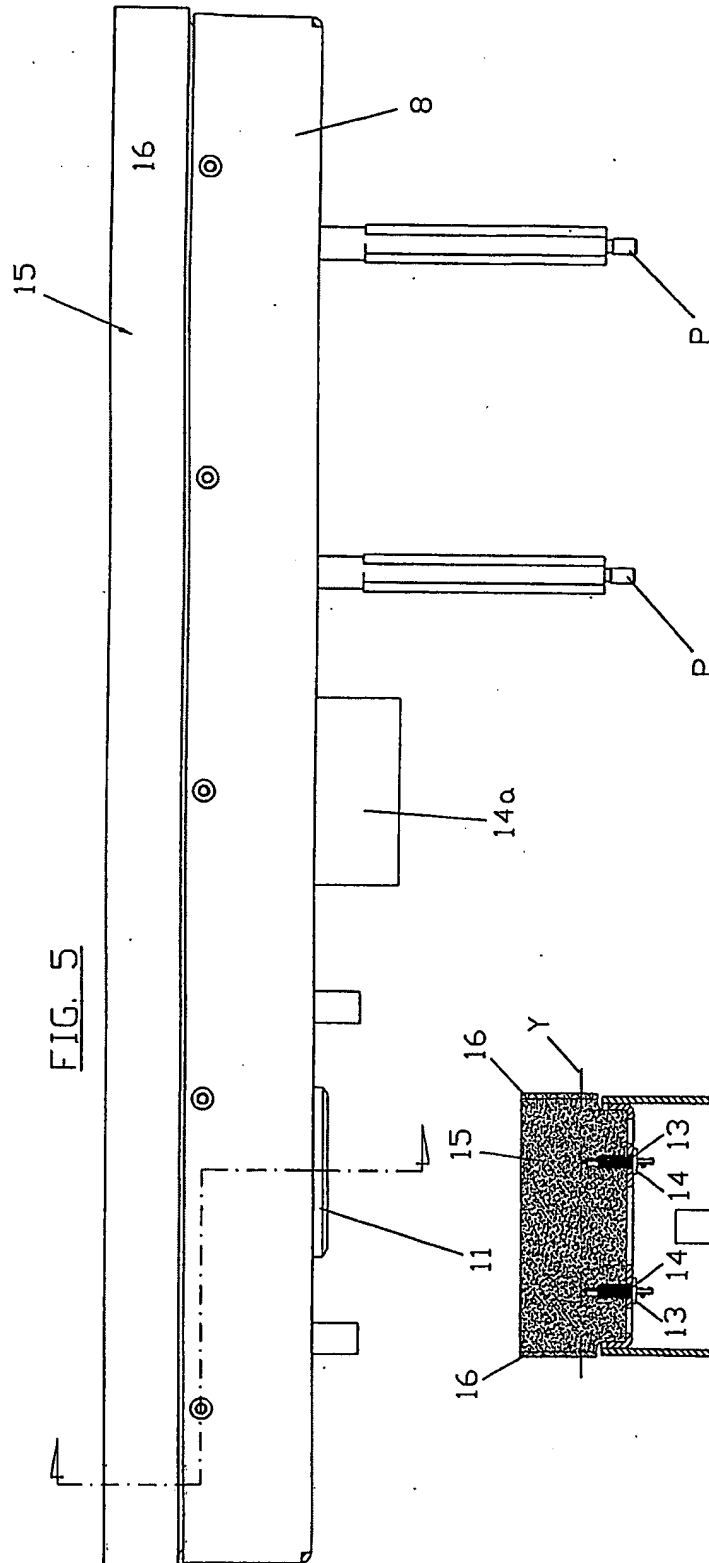
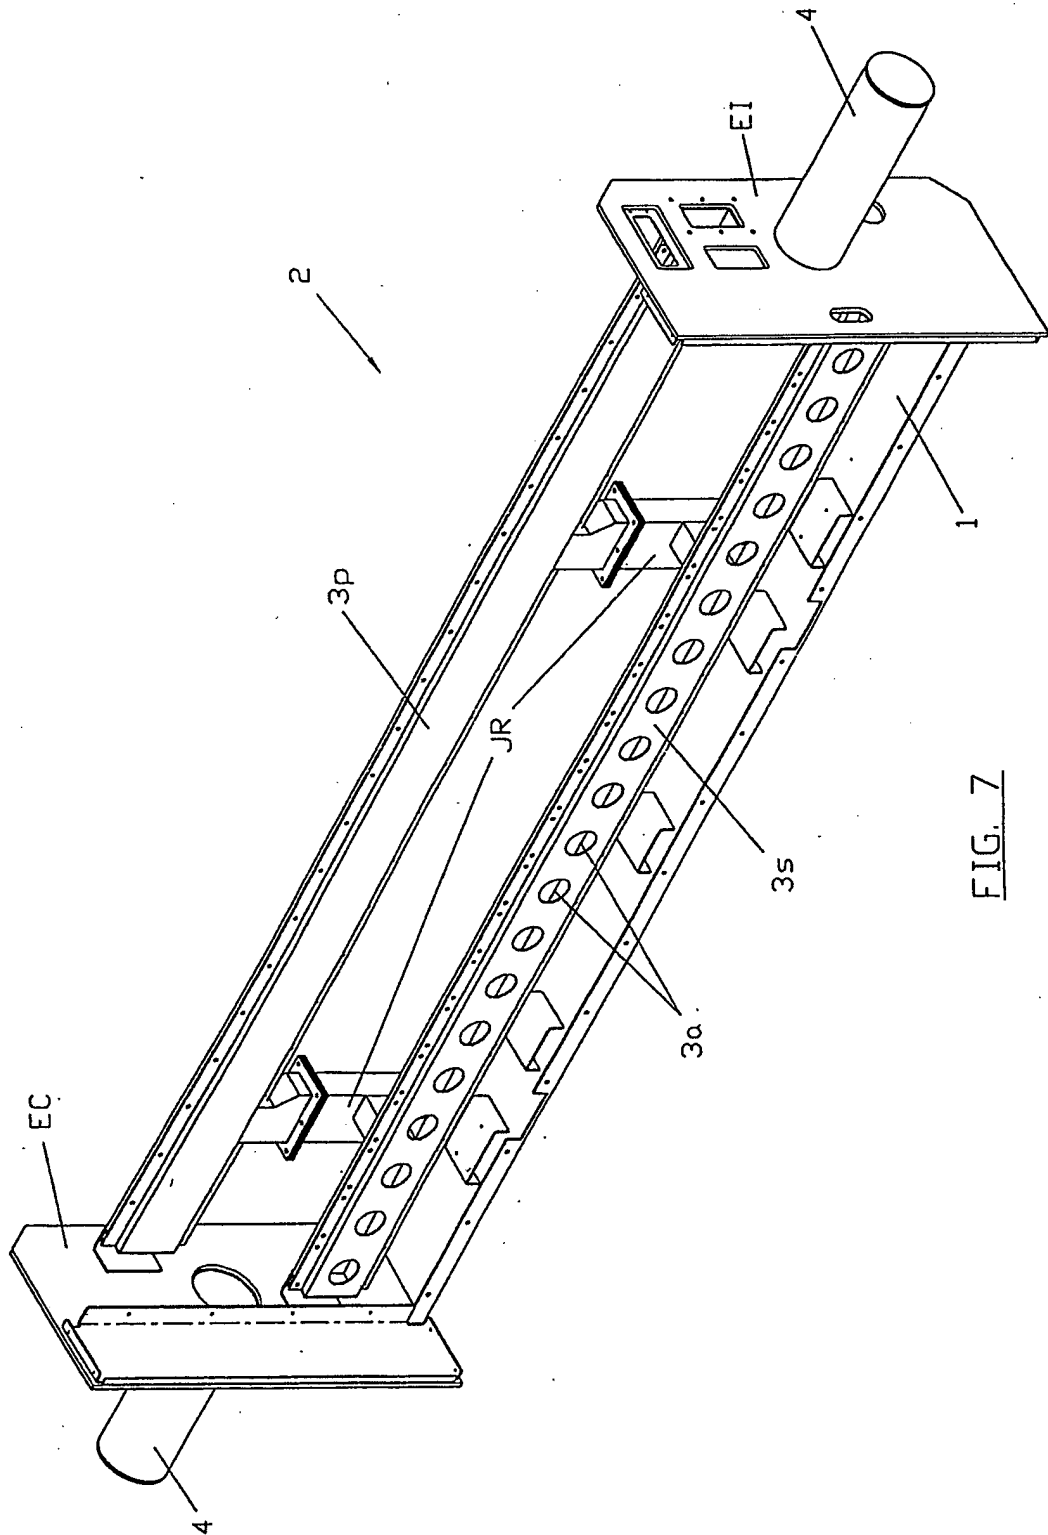


FIG. 4







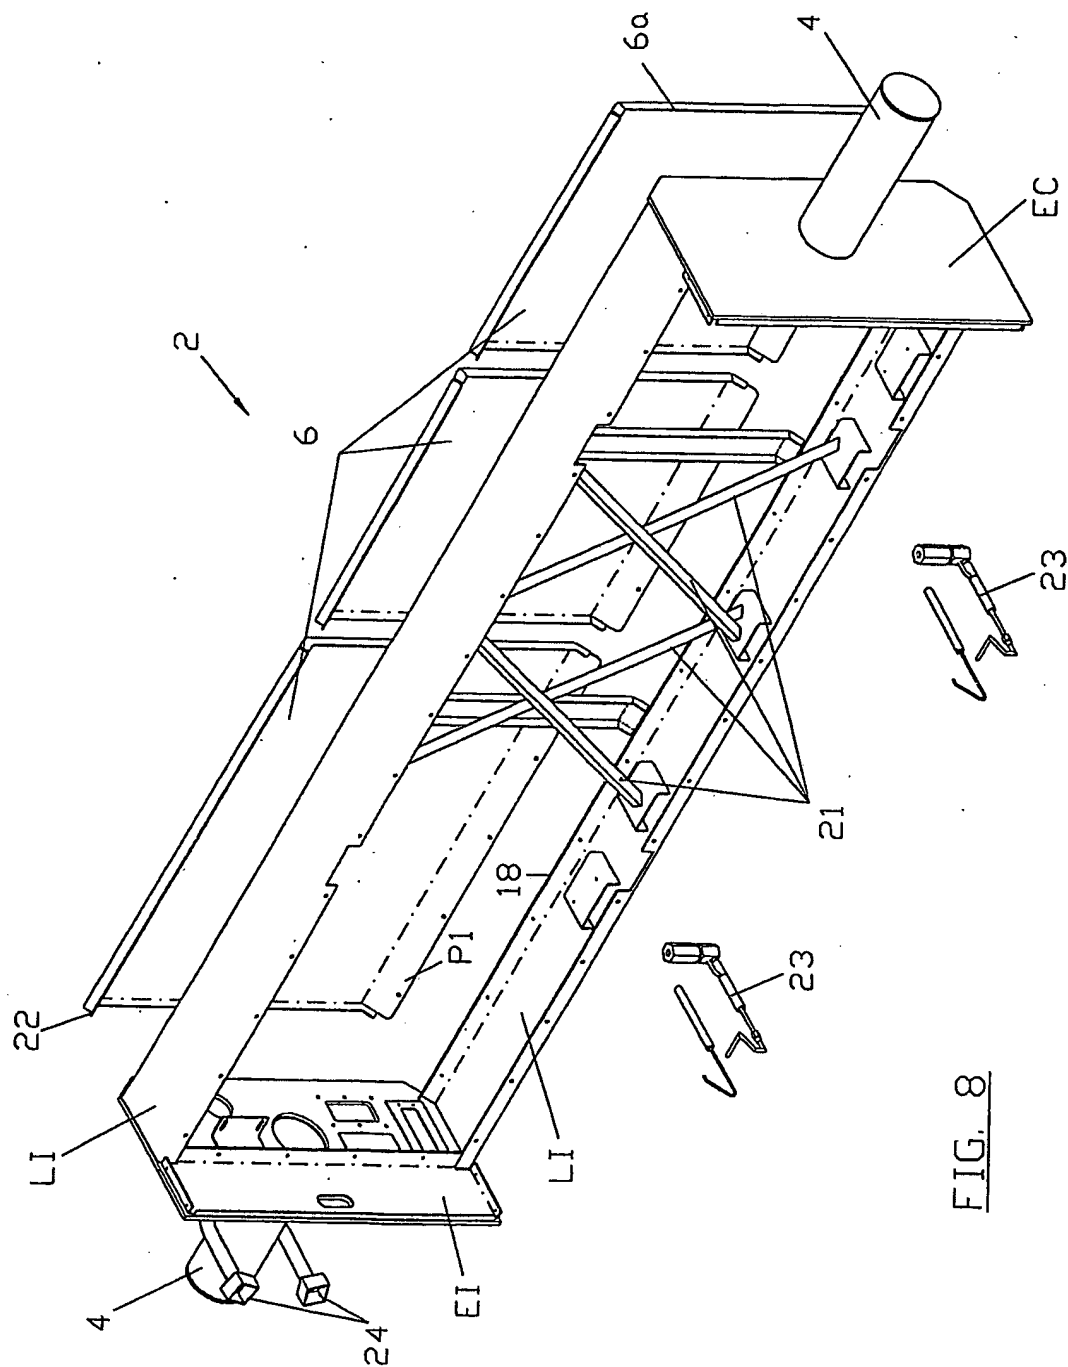


FIG. 8

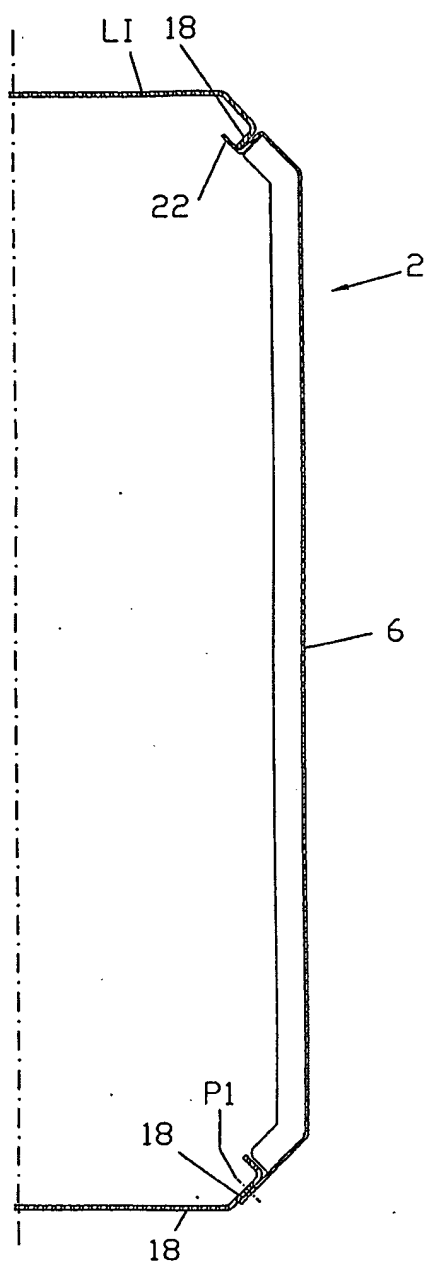
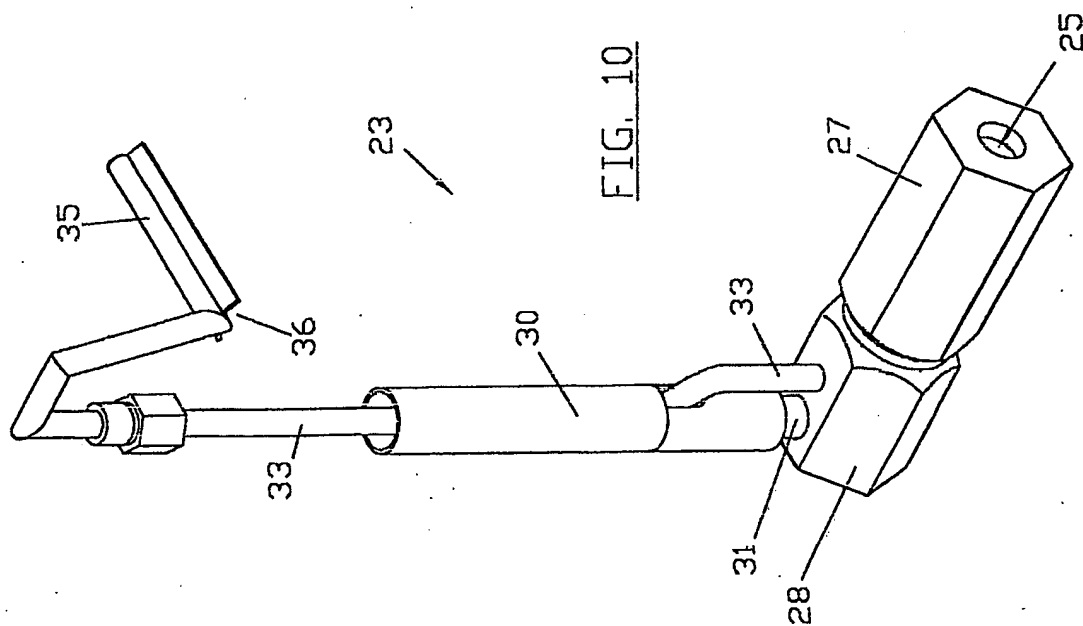
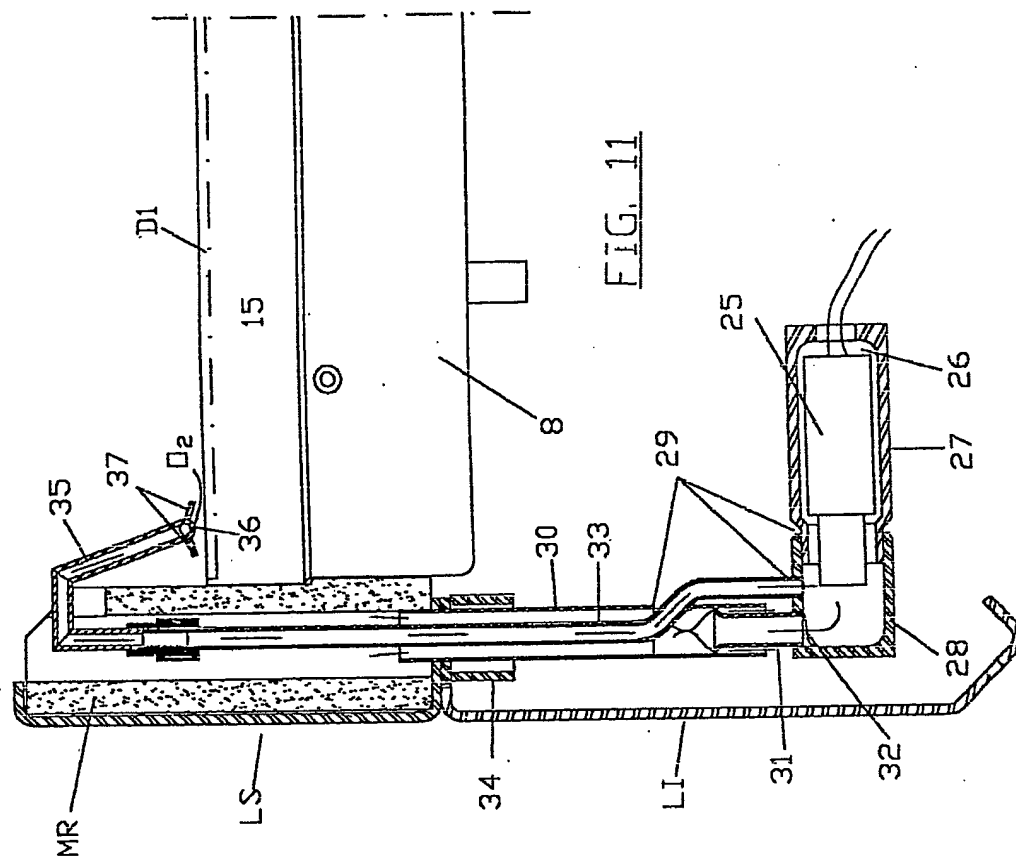
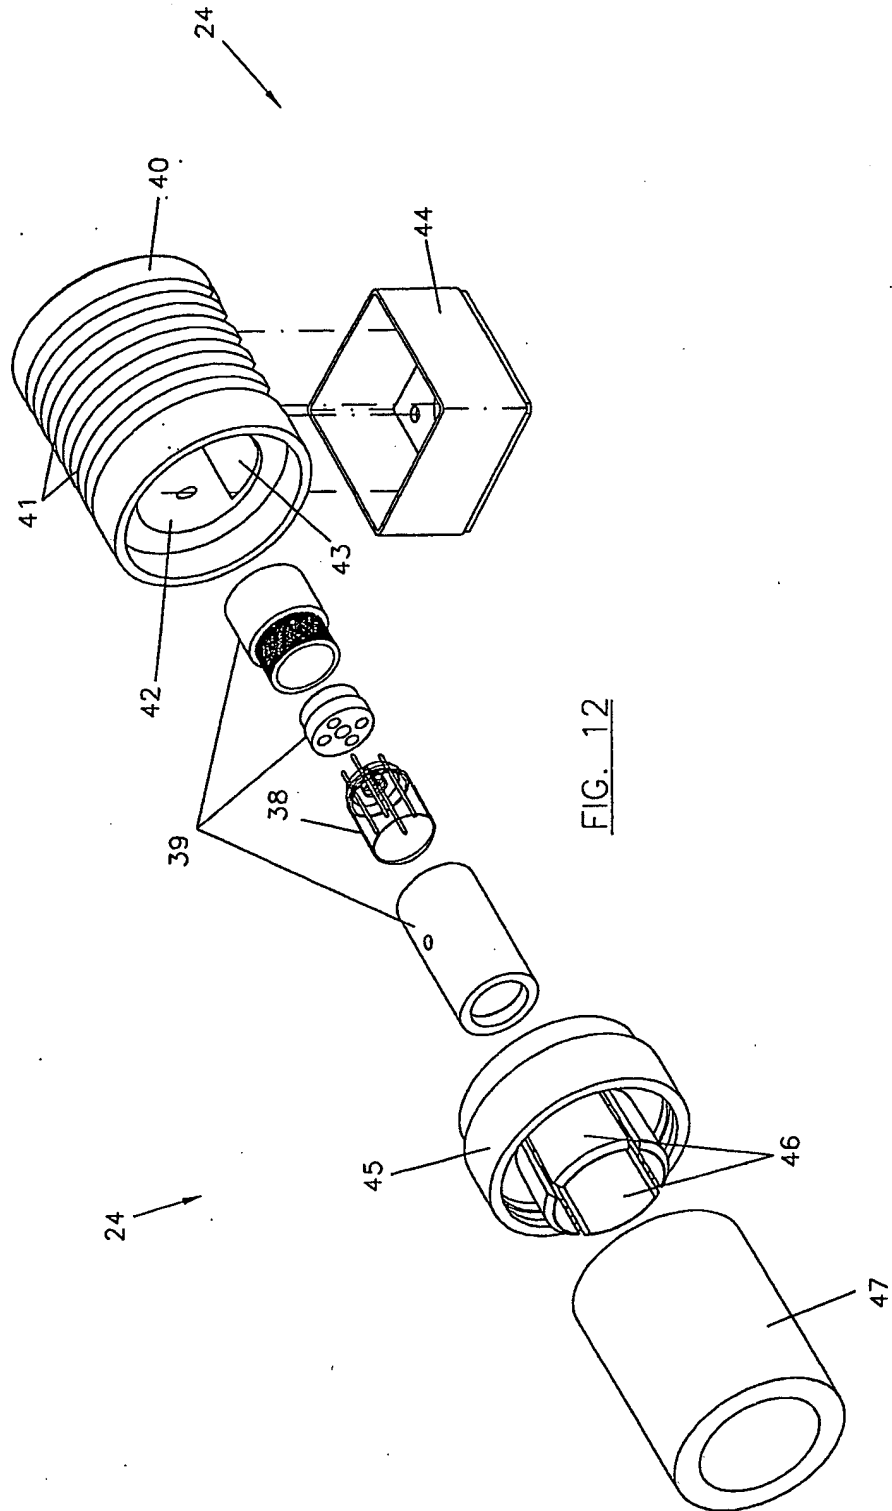


FIG. 9





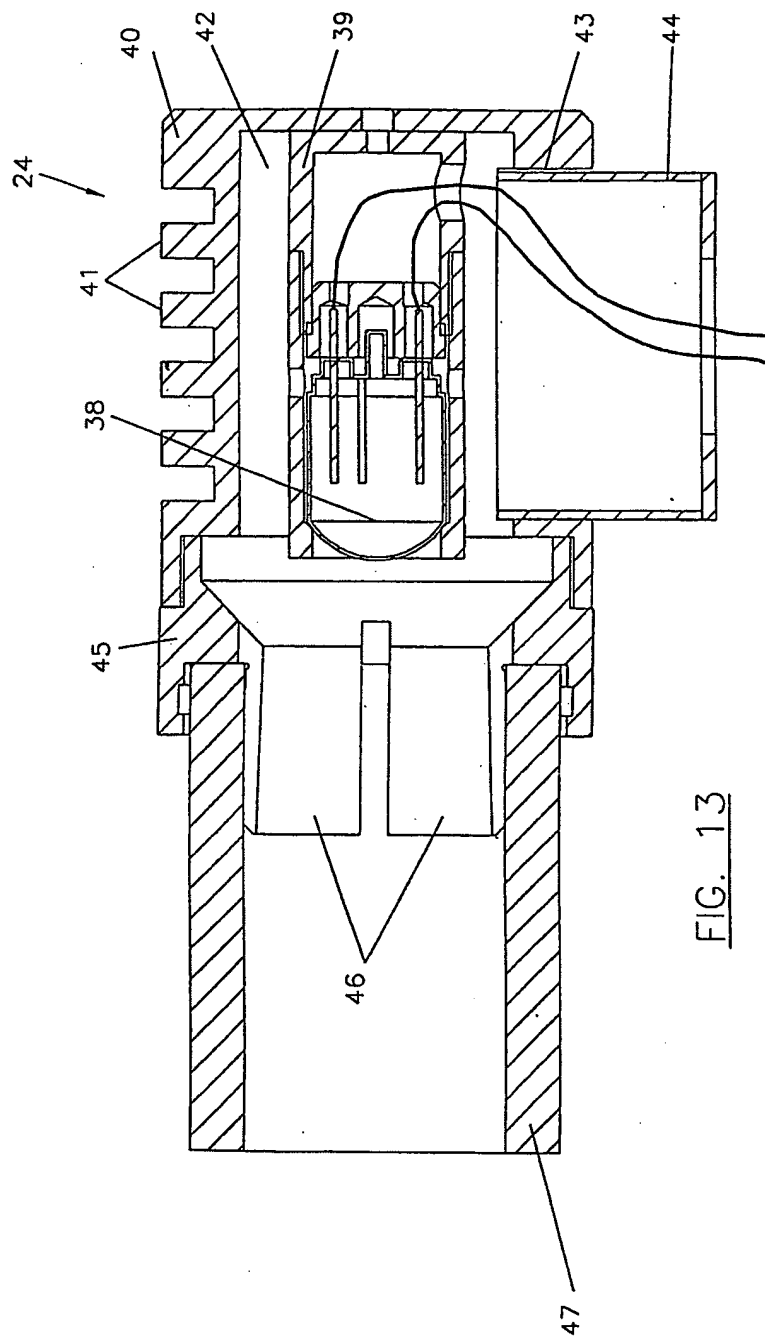


FIG. 13

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/BR 03/00159-0

## CLASSIFICATION OF SUBJECT MATTER

IPC<sup>7</sup>: D21F 5/00; H05B 6/00; G01N 21/00; F24C 15/24

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC<sup>7</sup>: D21F 5/00, F24C 15/24, G01N 21/00, H05B 6/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC, PAJ, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB 611122 A (P. DECK et al.) 26 October 1948 (26.10.48) <i>the whole document.</i>	1
A	EP 0465766 A1 (HERAEUS QUARZGLAS GmbH) 15 January 1992 (15.01.92) <i>abstract; claims; fig. 1-4.</i>	1
A	US 5502310 A (H.D. NIESTRATH et al.) 26 May 1996 (26.05.96) <i>abstract; column 1, line 7 - column 5, line 33; claims; fig. 1-4.</i>	1
A	US 4474552 A (T.M. SMITH) 2 October 1984 (02.10.84) <i>abstract; column 3, lines 12-35; column 13, lines 51-54; column 17, lines 47-55; column 19, lines 42-56; claims; fig. 1-18.</i>	1,15,23
A	US 3639207 A (H. GENZ et al.) 1 February 1972 (01.02.72) <i>the whole document.</i>	1

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

\* Special categories of cited documents:

„A“ document defining the general state of the art which is not considered to be of particular relevance

„E“ earlier application or patent but published on or after the international filing date

„L“ document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

„O“ document referring to an oral disclosure, use, exhibition or other means

„P“ document published prior to the international filing date but later than the priority date claimed

„T“ later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

„X“ document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

„Y“ document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

„&amp;“ document member of the same patent family

Date of the actual completion of the international search

21 January 2004 (21.01.2004)

Date of mailing of the international search report

12 February 2004 (12.02.2004)

Name and mailing address of the ISA/AT

Austrian Patent Office

Dresdner Straße 87, A-1200 Vienna

Facsimile No. 1/53424/535

Authorized officer

ERBER H.

Telephone No. 1/53424/410



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/BR 03/00159-0

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
EP	A	465766		none	
GB	A	611122		none	
US	A	3639207		none	
US	A	4474552		none	
US	A	5502310		none	